

## Rail Sectioning Front Compartment - Front

### Removal Procedure


**Caution:** Refer to *Approved Equipment for Collision Repair Caution* on page 1-1.

**Caution:** Sectioning should be performed only in the recommended areas. Failure to do so may compromise the structural integrity of the vehicle and cause personal injury if the vehicle is in a collision.


1. Disable the SIR system. Refer to *SIR Disabling and Enabling Zones* on page 1-129.

**Caution:** Refer to *Battery Disconnect Caution* on page 1-1.


2. Disconnect the negative battery cable.
3. Remove all of the related panels and the components.
4. Remove the sealers and anti-corrosion materials from the repair area, as necessary. Refer to *Anti-Corrosion Treatment and Repair*.
5. Repair as much of the damage as possible to factory specifications. Refer to *Dimensions - Body (Sedan)* on page 1-2.
6. Remove the tie bar attach bracket.

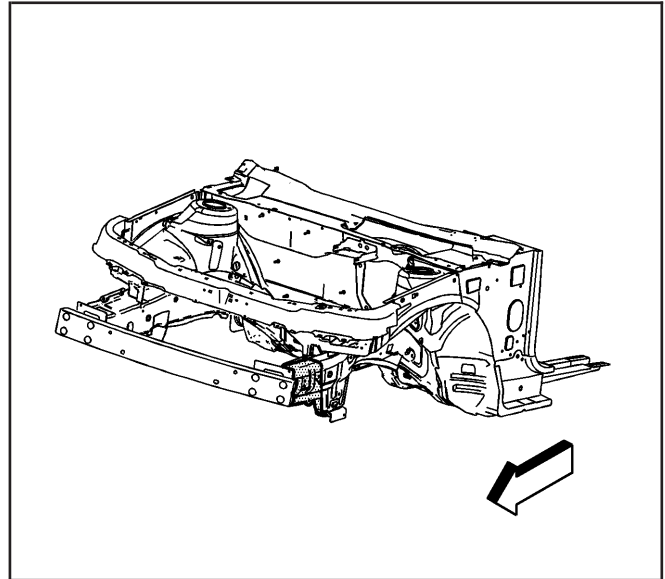

1212887

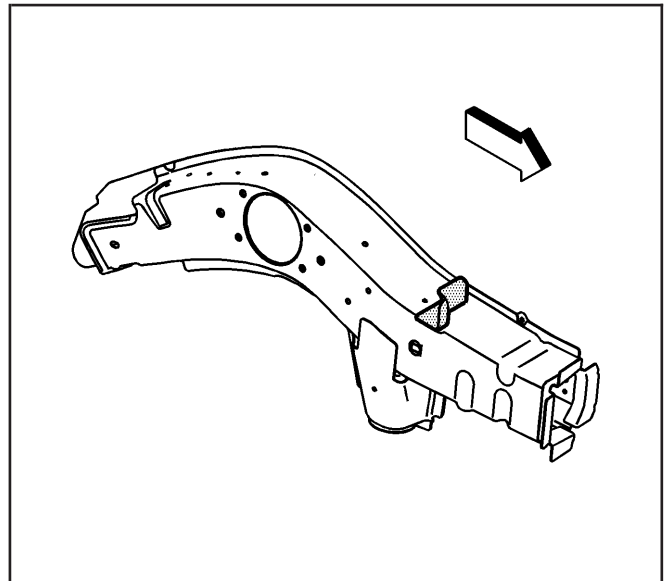


1212924

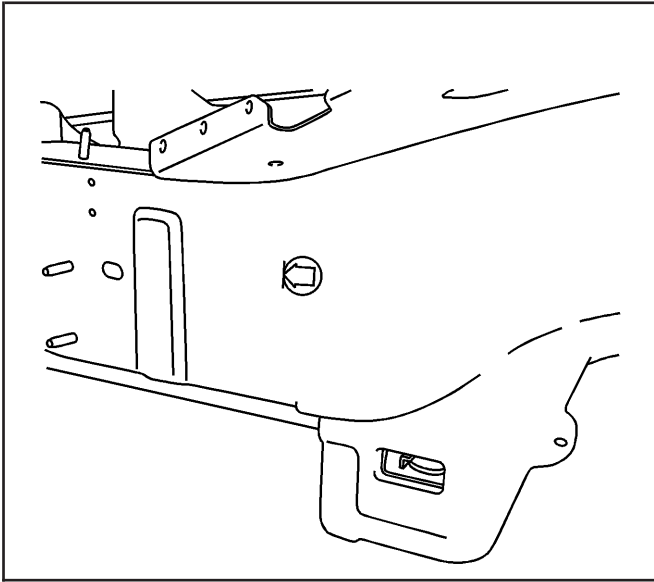

867581


7. Locate the die marks on the inner and outer halves of the front rail.

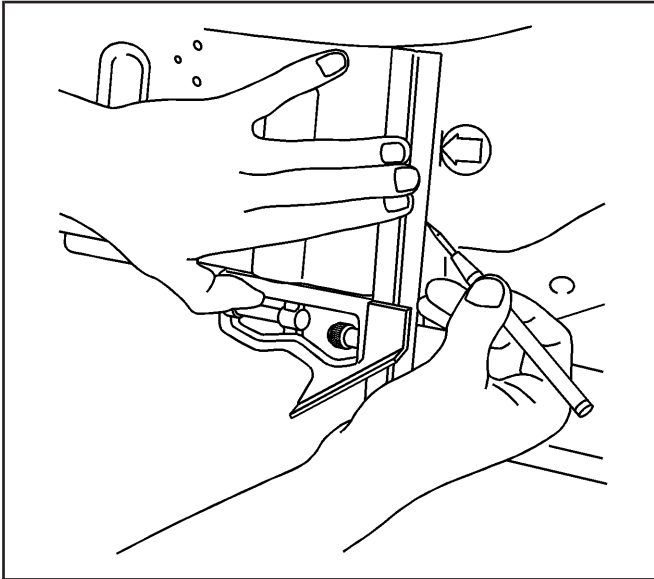

867585

**Important:** Do not section the rail except where indicated.


8. At the tip of the arrow in the die mark, align a sliding square or similar tool to the bottom side of the front rail. Scribe a line 360 degrees around the frame rail.

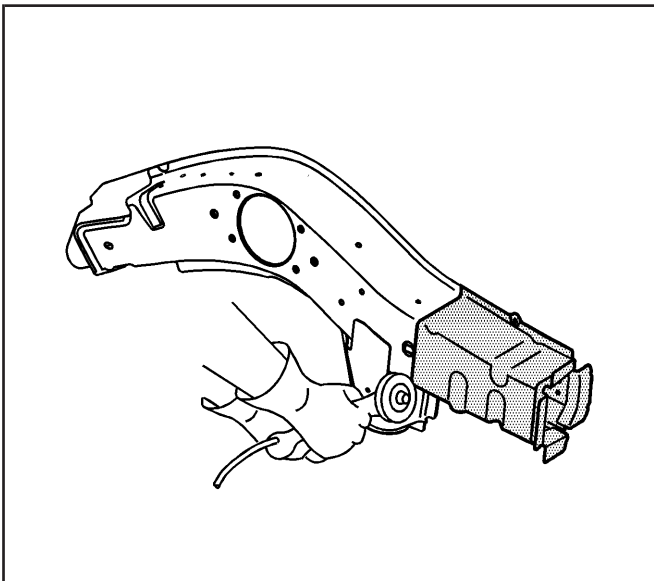

1212890

9. Cut the rail at the marked location.


10. Remove the damaged component from the vehicle.

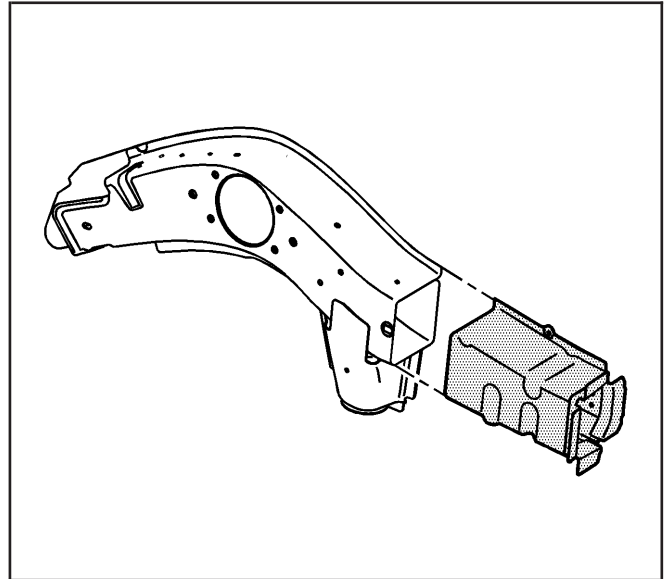

1212896


### Installation Procedure

1. In order to create the service part, complete the following steps:
  - 1.1. At the back side of the die mark on the service part, align a sliding square or similar tool to this line and the bottom side of the front lower rail. Scribe a line completely around the frame rail.
  - 1.2. Cut the rail at the marked located.
  - 1.3. Remove the front portion of the rail. This is the service part.

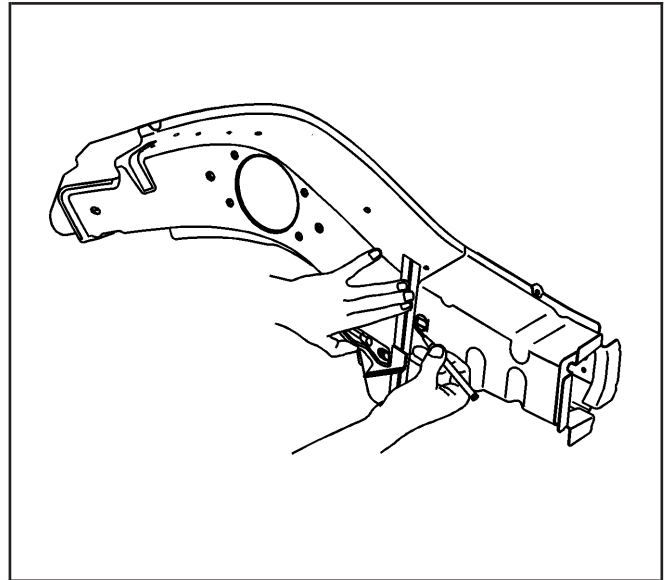


1213000

2. Cut the upper and lower inner and outer corners of the frame rail. Cut at the beginning and the end of the radius at each corner rearward 20 mm (3/4 in) to the scribe line.
3. Bend each side of the rail inward by aligning a vice grip flanging tool or similar tool to the scribe line. Bend a 20 mm (3/4 in) flange inward slightly. This flange is the welding backer that will fit into the existing frame rail on the vehicle.

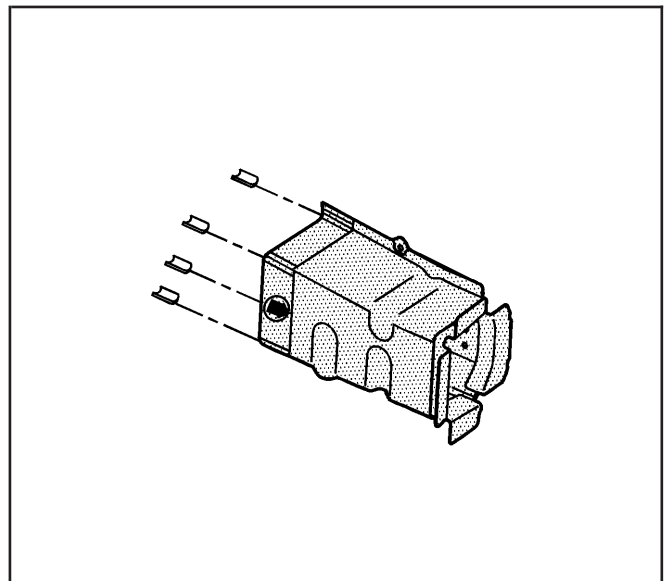


1371754

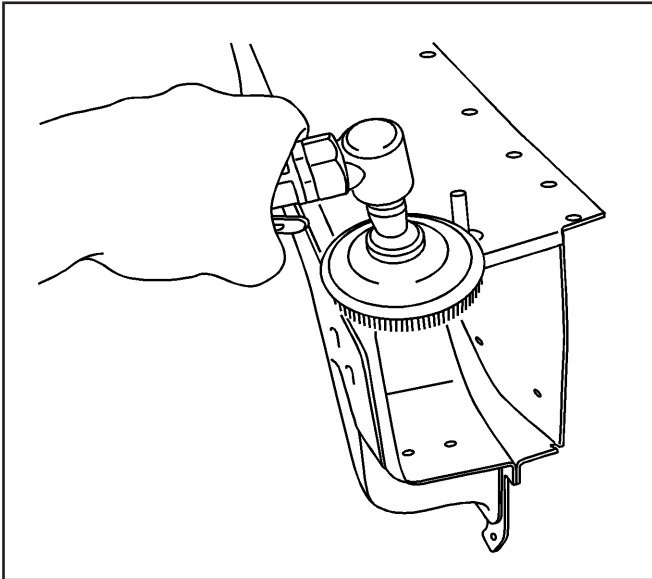

867591

4. Prepare the sectioning weld area as necessary for welding.
5. Apply 3M Weld-Thru Coating P/N 05916 or equivalent to all mating surfaces.
6. Insert the service rail into the undamaged frame rail of the vehicle.

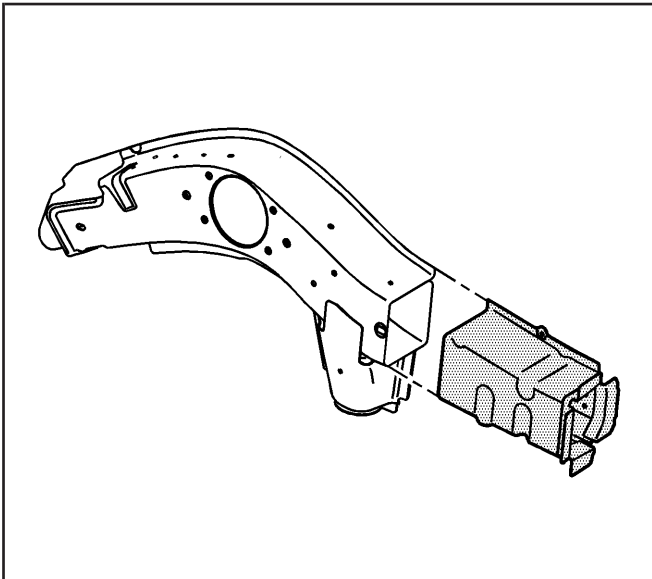

1212896


**Important:** Allow for a snug fit.

7. Position the front rail section using 3-dimensional measuring equipment. Clamp the service part in place.

8. Tack weld the part into position.
9. Inspect the service rail for proper dimensions using 3-dimensional measuring equipment.
10. Stitch weld along the entire sectioning joint. Make 25 mm (1 in) welds along the seam with 25 mm (1 in) gaps between.
11. Complete the stitch weld.
12. Install the tie bar attach bracket.
13. Clean and prepare the welded surfaces.
14. Install all of the related panels and components.
15. Apply the sealers and anti-corrosion materials to the repair area, as necessary. Refer to *Anti-Corrosion Treatment and Repair*.
16. Paint the repaired area. Refer to *Anti-Corrosion Treatment and Repair*.
17. Enable the SIR system. Refer to *SIR Disabling and Enabling Zones on page 1-129*.

**Caution: Refer to Battery Disconnect Caution on page 1-1.**

18. Connect the negative battery cable.

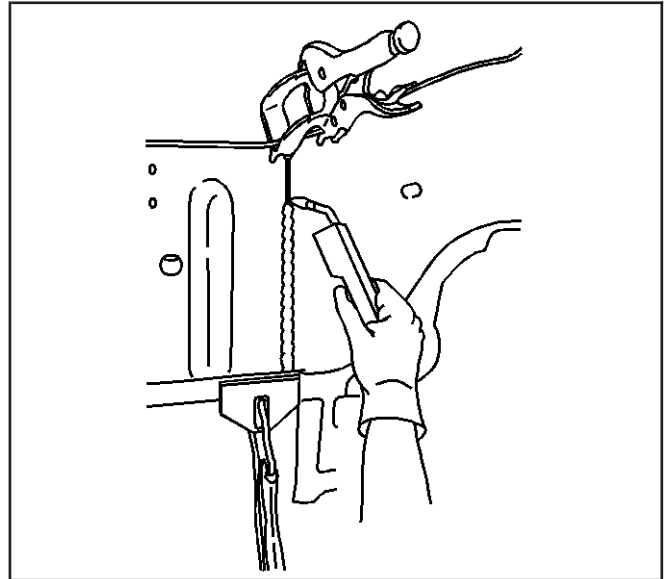

876346